


The Build Your Own MicrosunLyte Kit Includes:

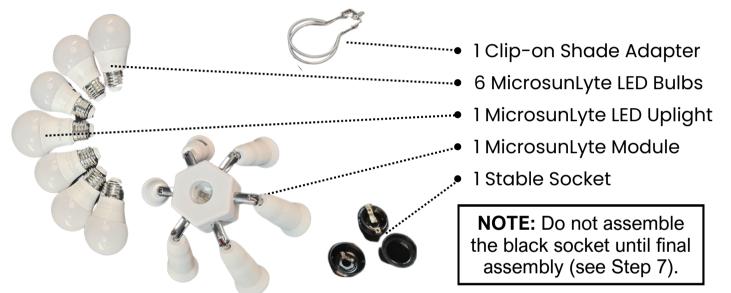

Plus one of the following Power Supplies:

Smart App and Plug

White Corded Slide

Black Corded Slide



For more information and video instructions, please visit the

MicrosunLyte Resource Center

microsunlamps.com/microsunlyte-resource-center




To speak with a technician call 888-328-8701 and choose option 4

1- UNPLUG YOUR LAMP!

- 2- Remove finial, shade, harp and bulb
- 3- Remove outer sleeve of socket



- 4- Unscrew and remove "hot" lead from gold screw terminal
- 5- Unscrew and remove "neutral" lead from silver screw terminal
- 6- Unscrew socket base from lamp and remove. Remove and discard the Harp Saddle.

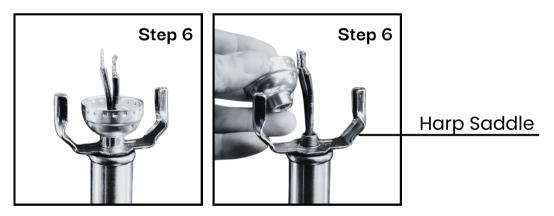


- 7- Install stable socket base over wires and screw onto threaded metal rod
- 8- Ensure exposed copper strands are wrapped tightly and not exceeding 1/4" or 6.35 mm
- 9- Insert exposed copper portion of the grooved insulation "neutral" wire into the "neutral" terminal of the socket insert and tighten screw*
- 10- Insert exposed copper portion of smooth insulation "hot" wire into "hot" terminal of the socket insert and tighten screw*

***NOTE- SEE PICTURES ON NEXT PAGE**

11- Pull excess wire back down to the base of the lamp until the socket insert is firmly seated in the socket base

NOTE: Terminals are not labeled. The hot terminal (smooth) engages the center of the bulb, and the neutral terminal (grooved) engages the side of the bulb.

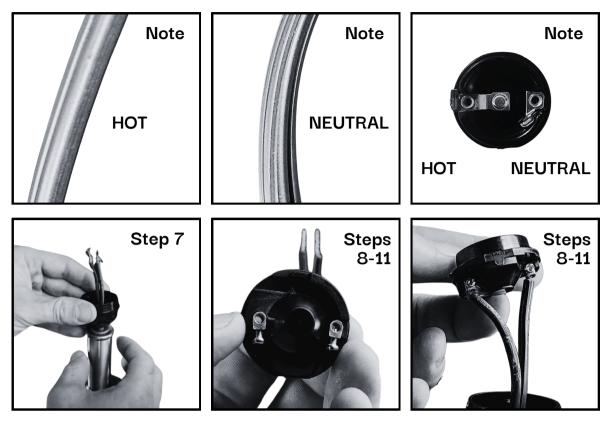

- 12- Screw on outer socket cover until snug
- 13- Screw in MicrosunLyte module
- 14- Screw in MicrosunLyte bulbs



- 15- Install Clip-on Shade Adapter, Shade and Finial
- 16- Plug the Smart Plug or Corded Slide Plug into an outlet and plug the lamp into the Smart Plug or Corded Slide Plug
- 17- Enjoy the Light!